

SANY[®]

CE

SPECIFICATION

BETTER WORLD, BETTER SANY CRANE

SRE450N

SANY ROUGH TERRAIN CRANE



45 t



37.4 m



48 m

www.sanyglobal.com

QUALITY CHANGES THE WORLD

The parameters, pictures and standard/optional equipment are only for reference in this brochure, the actual machine is based on the effective price list and contract.

V1.1

SANY CRANE is one of the core business units in SANY Group, specializing in the development and manufacturing of high-end wheeled cranes, crawler cranes and tower cranes.

三一集团旗下核心事业部，从事高端轮式起重机、履带起重机、塔式起重机系列产品的研发制造。

BETTER WORLD, BETTER SANY CRANE

SANY CRANE

QUALITY CHANGES THE WORLD



► CONTENTS 目录

Highlights 整机亮点	► 04
Overall Dimensions 整机尺寸	► 17
Technical Specification 整机参数	► 18
Counterweight Combinations 配重组合	► 20
Crane Introduction 整机介绍	► 21
Working Conditions & Code Description 工况组合及工况代码说明	► 23

SANY Rough Terrain Crane SRE450N / 45t Lifting Capacity

A 45t rough terrain crane with five section 37.4m boom, vehicle width < 2.55m, featuring stronger capacity yet reduced self-weight. Jib swing-out process is controlled hydraulically via remote device in only 15 minutes, allowing quick setup once arriving at jobsite. Key components come from international name brands. Operator comfort is improved by brand new cab design.

一款最大起重量45吨，5节臂，全伸臂长37.4m，车宽 < 2.55m的越野起重机，自重轻，性能强，副臂远程操控，液电辅助15分钟内完成收展，核心部件均为国际知名供应商提供，配备全新操纵室，驾驶、操作舒适度全面升级。



■ Strong lifting capacity

Best in class

超强性能

性能超越行业同吨位

■ Auto-swing jib

Swingout/back via remote control

自动化副臂

远程控制15分钟完成收展

■ Brand-name components

Cummins engine/Dana transmission/Meritor axles

国际知名供应商

康明斯发动机/德纳变速箱/美驰车桥



■ All new operator's cab

Ergonomic concept of safety and comfort

全新操纵室

操作安全、舒适、人机工程全面升级


■ Convenient transport

One-trailer transport at low operational cost

超便捷运输

一车整运，运营成本低

All New Operator's Cab 全新操纵室

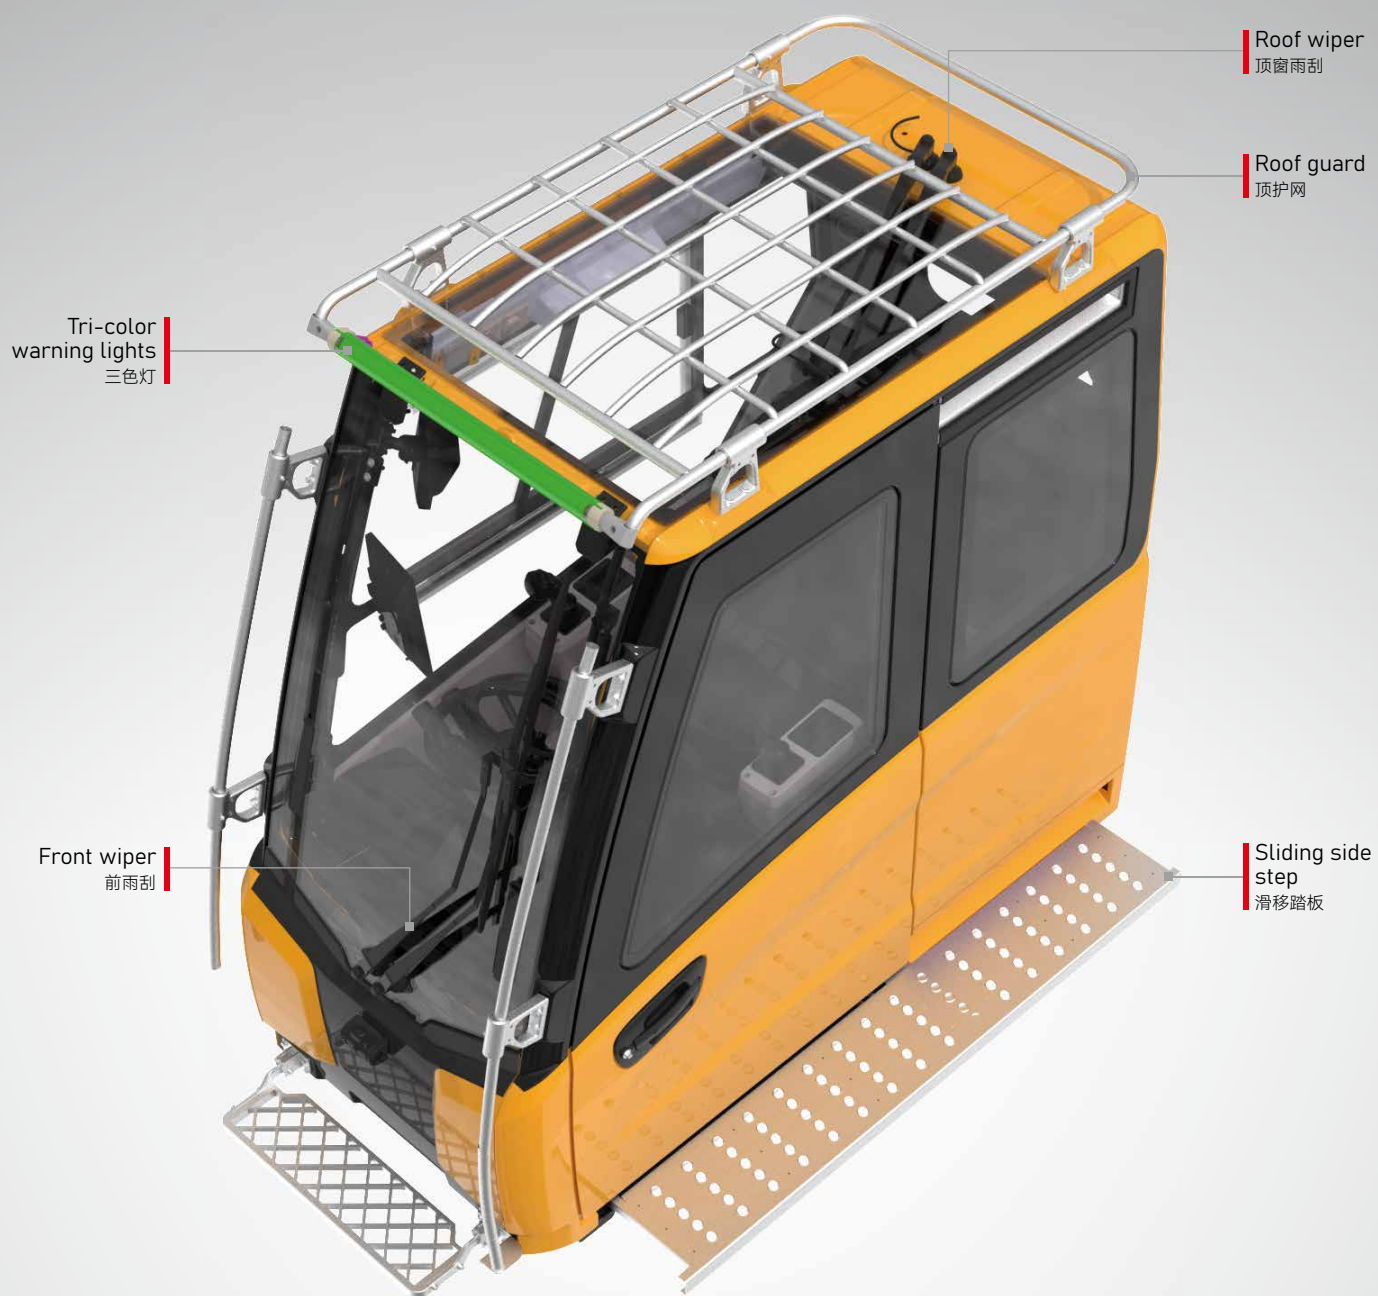

Safety & Reliability
安全可靠



Comfort & Convenience
舒适便捷



Simplicity & Efficiency
简单高效



Rearview and winch monitor
卷扬监视器

Emergency stop switch
急停开关

10.1 inch LMI screen
10.1 寸显示屏

Outrigger control panel
支腿控制面板

Pedals
踏板布置

Steering column
方向柱

Cup holder
水杯托


Joystick
手柄

Joystick
手柄

Left control panel
左扶手箱控制面板


Right control panel &
LMI navigation knob
右扶手箱控制面板

Armrest
扶手箱

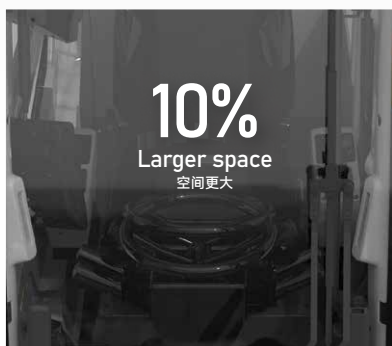

Integrating SUV genes, overall space is enlarged by 10% and forward field of vision is increased by 33%. The front windshield can be opened by 110 degrees, providing better ventilation and a second emergency exit.

融入SUV基因，整体空间增大10%，配备超大可开合110°前挡风玻璃，视野提升33%，增加空气对流，并可作为快速逃生通道。

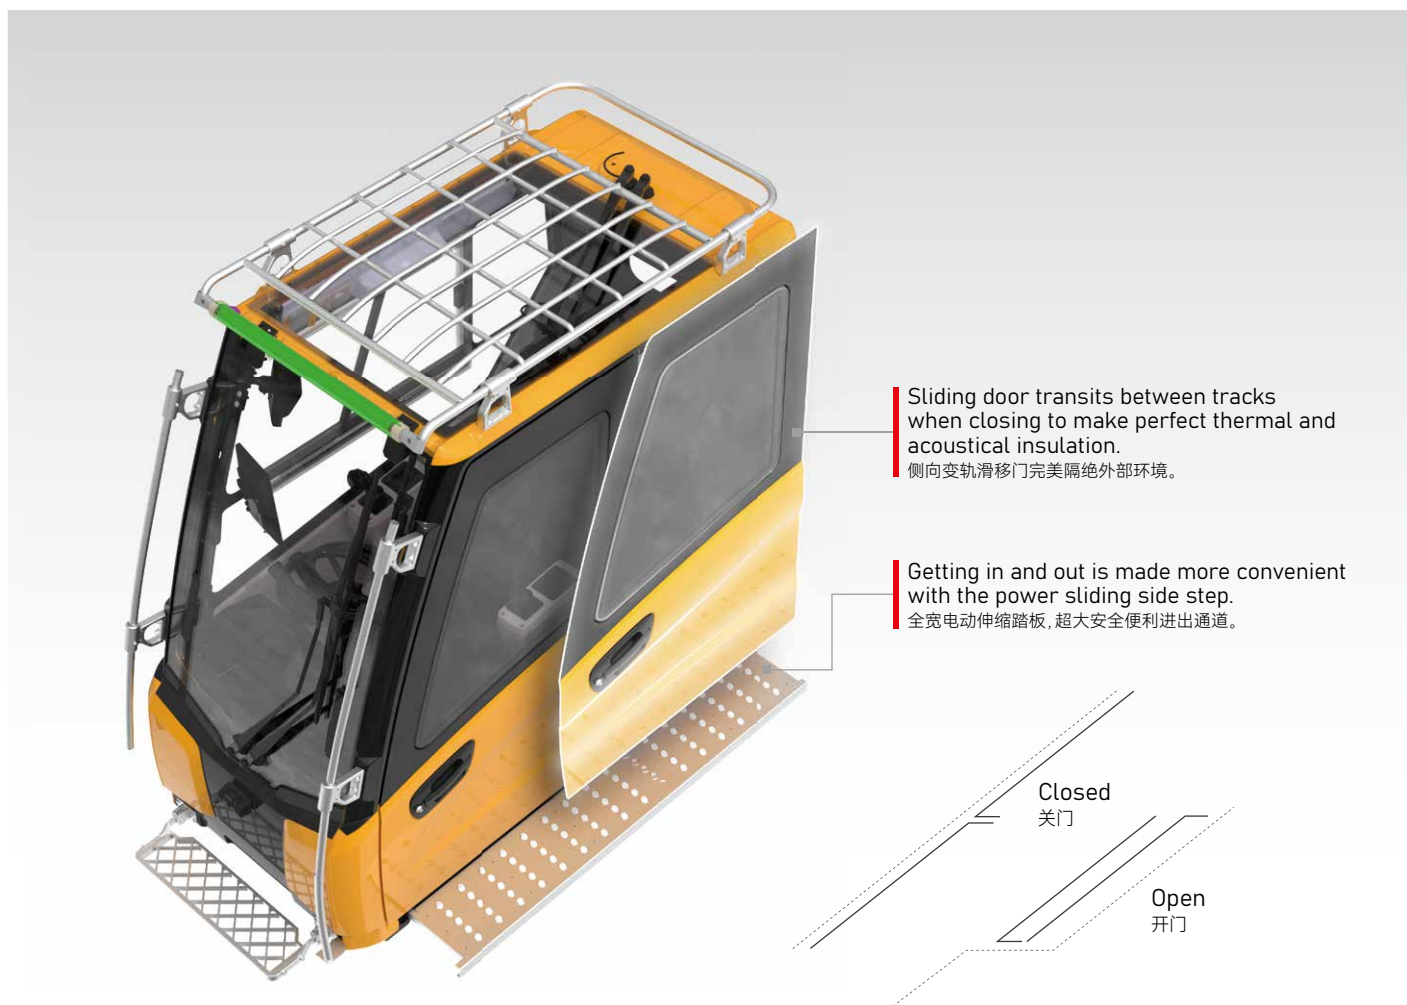

Adjustable steering wheel for driving and controlling, modular control panels, and smart user interface deliver intuitive and highly efficient control.

驾控一体的方向盘、模块化控制面板、UI智能操作界面，数字与科技的完美结合。



Auto-swing Jib

自动副臂系统

Hydraulic power-assisted jib deployment, handled by one person using a remote controller within 15 minutes.

自动化副臂：液电辅助收展配合远程控制，单人操作15分钟内即可完成。



Wired remote controller (Optional)

有线遥控器(选配)



-  Pin in 插销
-  Pin out 拔销
-  Extension 伸展
-  Retraction 收缩

Wired remote controller (Optional)
有线遥控器(选配)

Wireless Remote Control System (Optional)

无线遥控系统(选配)

Main functions

Outrigger control - single-piece / single-side outrigger beam and jack telescoping in/out.

Crane operation - boom telescoping, luffing, slewing, hoisting.

Auxiliary action control - jib pushing/pulling.

主要功能

支腿控制——单个和单边支腿水平伸缩、垂直起落。

上车作业——实现伸缩臂、起落幅、回转、卷扬收放绳。

辅助动作操作——副臂推拉。



Convenient Transport

行驶运输便捷性

Four Steering Modes

四种转向模型



①
2 wheel front
前轮转向模式



②
2 wheel rear
后轮转向模式



③
4 wheel
四轮转向模式



④
Crab
蟹行模式




Steering control panel
转向控制面板

One-Trailer Transport

一车整运

The basic machine is transported at 31.3t with counterweight, jib and hooks, 2.54m wide and 3.6m high, satisfying road regulations.

主机运输尺寸为长11.5m，宽2.54m，高3.6m，重量为31.3t（带配重、副臂、副卷和吊钩），满足道路运输要求。

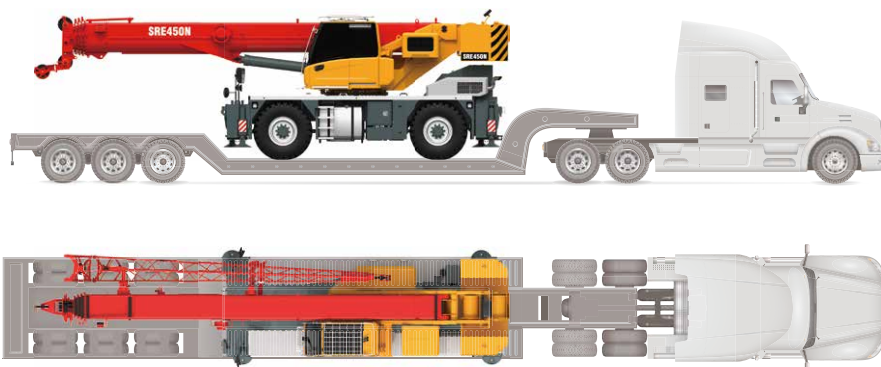

Carrier Frame

车架底盘

Inverted trapezoidal variable cross section frame is 10% stronger in rigidity.


倒梯形变截面车架，实现车架刚性提升10%。



↑ 10%
Rigidity 刚性



High strength frame
高强车架

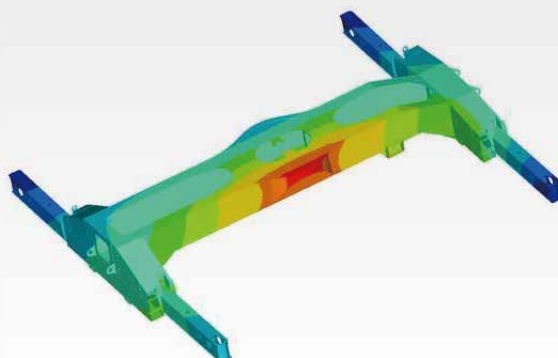

Stable support
稳定支腿

Electrical System

电气系统

Smart CAN-BUS Communication System

International advanced CAN-BUS data communication network applied for display, instrument panel, I/O module, joysticks and main sensors, allowing for high-speed data transmission and quick response in less than 20ms.

Advanced Multi-Function Display Screen

Features a 10.1-inch high-definition display with a brand-new user interface, supporting multiple control methods, including touch and rotary knob operation. The screen provides comprehensive equipment status information, such as working conditions, load moment, engine and transmission data, controller I/O points, and operation time statistics. It also integrates extended features like virtual walls, and a radio.

Precise Load Moment Indicator

SANY independently developed high-precision LMI, with an accuracy of 0~5%.

Cabling

Centralized junction box and heavy-duty connector applied for cabling of superstructure, convenient for maintenance; IP rating up to IP67, ensuring high reliability.

Winch Camera

Winch cameras equipped for monitoring its working condition and identifying rope disorder in time.

Integrated Bus Button Panel Input

Various operating states displayed by button indicator lights, and one-button multi-functional operation realizable by writing various operation modes.

智能总线通信系统

国际先进的分布式集成总线数据通信网络，显示器、显示仪表、I/O模块、操作手柄、主要传感器等采用CAN总线组网，高速信息传输、响应速度小于20ms。

高新多功能显示屏

采用10.1寸高清显示屏，全新操作界面，可实现触摸与旋钮多方式操控。工况、力矩、发动机、变速箱、控制器IO点、工作时间统计等丰富的设备状态信息呈现，集成虚拟墙、收音机等多种扩展功能。

精准力限器系统

三一自主研发的力矩限制器系统，精度达0~5%。

电缆布线

上车电缆布线采用集中式分线盒及重载接插件，维护方便；防护等级IP67，可靠性高。

卷扬监控系统

卷扬摄像头监视卷扬工作及时发现乱绳的情况。

集成总线按键面板输入

可通过按键指示灯显示各种工作状态，通过写入多种操作模式实现一键多功能。

Power Train

动力系统

Engine

Power comes from a Cummins B6.7 inline six-cylinder water-cooled, turbocharged and intercooled off-highway diesel engine, complying with Stage V emission standard.

Rated power: 173kW/2000rpm.

Max. torque: 949N-m/1500rpm.

Transmission

Dana electronically controlled auto transmission features 6 speeds forward and 3 speeds reverse, wide ratio range, and smooth gearshift with reduced maintenance cost.

Axles and Suspension

Meritor axles, both axles are driven and steered. Front axle is mounted to the frame by independent steel plate, and rear adopts oscillation cylinders with hydraulic lockout. Driving comfort and lateral stability is therefore guaranteed on rough terrains and conditions.

发动机

康明斯B6.7欧五阶段非道路直列六缸水冷、增压中冷柴油发动机。

额定功率：173kW/2000rpm。

最大扭矩：949N-m/1500rpm。


变速箱

德纳全自动电控变速箱，6个前进挡、3个后退挡，速比范围大，换挡平顺无冲击，维修保养成本低。


车桥悬架

美驰车桥，前后桥均为驱动桥和转向桥。前桥采用独立式钢板连接，后桥采用摆动支架式，液压油缸闭锁悬架系统；能适用各种恶劣工况和路面，保证车辆行驶的平顺性和侧翻稳定性，驾驶舒适。





标配树根物联终端T-AMS Pro，通过对起重机设备的远程控制，在电脑或移动端MachineLink+平台实现轨迹回放、设备状态、维保设备、报警管理等功能，极大提高客户设备管理效率，提升三一售后服务能力。

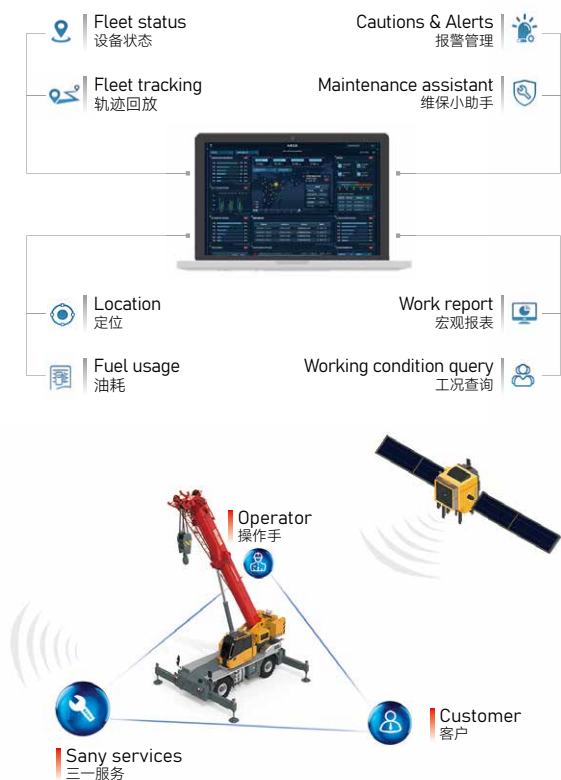

Hydraulic System

5节主臂, 双缸绳排, 1号缸控制第2节臂; 2号缸通过绳排结构控制第3/4/5节臂伸缩, 可实现同步伸缩, 臂长任意组合, 省时省力。



Superstructure

上车

Open-type electronically controlled load-sensing system.
Electro proportional compensated passive luffing-down system applied to control the luffing speed, making luffing more reliable and stable.
360° slewing brake realizing precise control of slewing speed.
Electronically controlled load-sensing hydraulic system, electronic joystick and electronic throttle, ensuring easy operation and more accurate control and millisecond-level action response speed, with min. single-rope hoisting speed 0.8m/min, and distribution difference in case of combined motions 8%.

通过开式电控负载敏感系统。

电比例自重落幅系统控制落幅速度，更可靠更平稳。

具备360°回转制动功能，可实现回转速度精准控制。

电控负载敏感液压系统，采用电手柄、电油门控制，轻松操作的同时，控制更精准。动作响应毫秒级速度；卷扬单绳最低速度0.8m/min；复合动作分配误差8%。



Chassis

下车

Steering System

A gear pump installed to supply oil for hydraulic steering, steering pressure controlled by electro-proportional relief valve, four steering modes realized by solenoid directional valve.

Suspension System

Different modes including normal driving and Pick & Carry with suspension locked, suspension to be locked when the crane is working.

Outrigger Telescoping System

The electro proportional relief valve identifies pressure staging of outrigger telescoping, satisfying operation requirements under high pressure and forming protection under limited pressure.

转向系统


液压转向系统采用齿轮泵提供油源，通过电比例溢流阀精确控制转向压力，通过电磁换向阀实现前轮转向，后轮转向，全轮转向和蟹行转向共计四种转向模式。

悬挂系统

悬挂系统通过选择不同的悬挂模式可以实现正常行驶和锁定模式下的带载行驶；在起重机上车作业时能够对悬挂进行锁定。


支腿伸缩系统

支腿伸缩采用电比例溢流阀对支腿伸缩进行压力分级，既满足高压动作需求，也可满足限压保护功能。

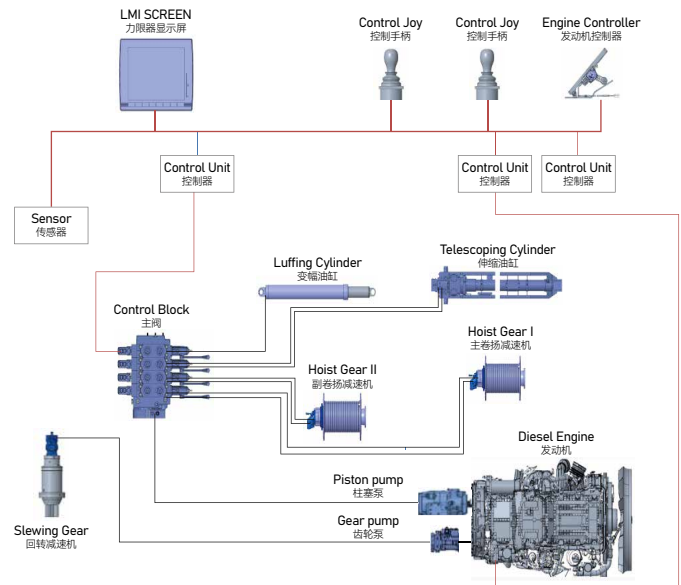

Overall Dimensions

整机尺寸

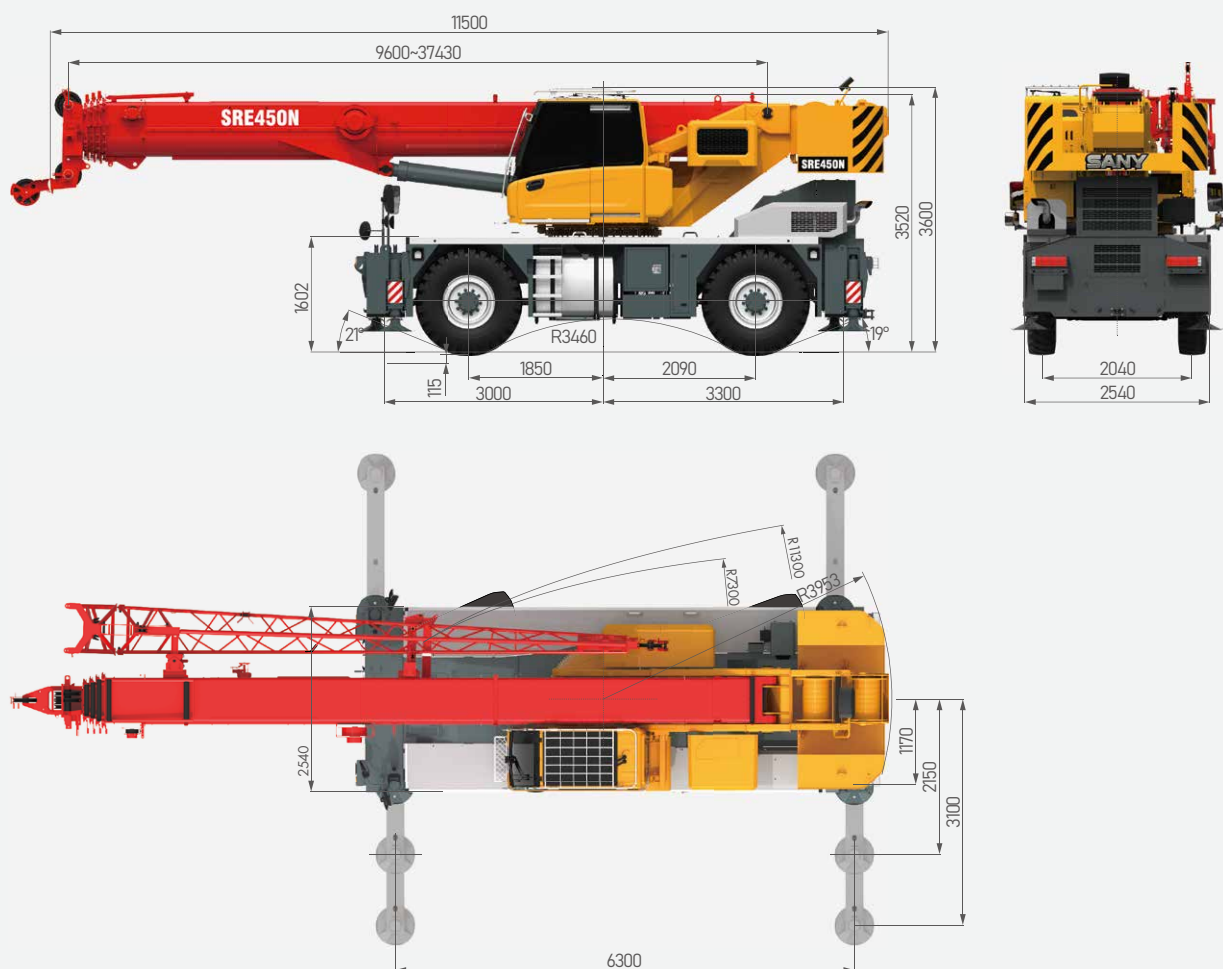

Technical Specification

整机参数

CATEGORY 类型	ITEM 项目	UNIT 单位	VALUE 参数	
CAPACITY 额定起重量	Max. lifting capacity 最大起重量	t	45	
WEIGHT 重量参数	Gross weight 整机总质量	kg	31300	
POWER 发动机参数	Engine model 发动机型号(排放标准)	-	B6.7 (Stage V)	
	Max. engine power 发动机最大功率	kW/rpm	173/2000	
	Max. engine torque 发动机最大输出扭矩	N-m/rpm	949/1500	
DIMENSIONS 尺寸参数	Overall length 整机全长	mm	11500	
	Overall width 整机全宽	mm	2540	
	Overall height 整机全高	mm	3600	
TRAVEL 行驶参数	Max. travel speed 最高行驶速度	km/h	25	
	Steering radius 转弯半径	Min.steering radius 最小转弯半径	m	11.6/7.3
		Min.steering radius of boom tip 臂头最小转弯半径	m	10
	Wheel formula 车轮模式	-	4×2/4×4	
	Min.ground clearance 最小离地间隙	mm	415	
	Approach angle 接近角	°	21	
	Departure angle 离去角	°	19	
	Max. gradeability 最大爬坡度	-	98%	
MAIN PERFORMANCE 主要性能参数	Working temperature range 使用温度区间	℃	-20~+51	
	Min.rated lifting radius 最小额定幅度	m	2.5	
	Tail slewing radius 转台尾部回转半径	m	3.95	
	Boom sections (Qty.) 臂节数	-	5	
	Boom shape 臂形状	-	U shape U型	
	Max.lifting moment 最大起重力矩	Basic boom 基本臂	kN-m	1396
		Full-extension boom 全伸主臂	kN-m	550
		Full-extension boom + jib 全伸主臂+副臂	kN-m	388
	Boom length 臂长	Basic boom 基本臂	m	9.6
		Full-extension boom 全伸主臂	m	37.4
		Full-extension boom + jib 全伸主臂+副臂	m	45.4
	Max.lifting height 最大起升高度	Basic boom 基本臂	m	12.5
		Full-extension boom 全伸主臂	m	40.1
		Full-extension boom + jib 全伸主臂+副臂	m	48
	Outrigger span (Longitudinal×Transverse) 支腿跨距(纵×横)	m	6.3×6.2	
	Jib offset 副臂安装角度	°	0, 20, 40	
AIR CONDITIONER 空调	In operator's cab 上车空调	-	Heating & cooling 制冷、制热	

Technical Specification

整机参数



Axle Load Distribution 轴荷分布

Rated load 额载 /t	Weight (kg) 重量	Load on front axle (kg) 前轴轴荷	Load on rear axle (kg) 后轴轴荷
Basic machine 主机	29560	13400	16160
Optional Configuration 选配装置	-	-	-
Auxiliary hoist 副卷扬	650	-250	900
Fixed jib 副臂	550	1170	-620
Auxiliary boom nose 臂尖滑轮	35	85	-50
45t main hook 主钩	420	1000	-580
40t main hook 主钩	320	770	-450
5t auxiliary hook 副钩	85	215	-130



Axle Load 轴荷

Axle 轴	1	2	Gross weight 总重量
Axle load/kg 轴荷	15500	15800	31300

Remark: Boom angle 0°, with main hook, aux. hook, jib, Aux. hoist.
备注: 起重臂角度0°, 包含1主钩, 1副钩, 副臂, 副卷扬。



Hook 吊钩

Rated load 额载 /t	Number of sheaves 滑轮数量	Rope rate 倍率	Hook weight/kg 吊钩重量
45 ○	5	10	420
40 ●	4	8	320
5 ○	-	1	85

● Standard 标配 ○ Optional 选配



Operations 主要动作参数

Item 项目	Max.single rope lifting speed (empty load) 单绳速度 (空载)	Rope diameter/length 钢丝绳直径 / 长度	Max. single line pull 最大单绳拉力
Main winch 主卷扬	130m/min	Φ16mm/165m	5.6t
Auxiliary winch 副卷扬	130m/min	Φ16mm/110m	5.6t
Stewing speed 回转速度	2.6r/min		
Full luffing up/down time of boom 主臂起落幅时间	45s/50s		
Full extension/retraction time of boom 主臂伸缩时间	100s/100s		
Outrigger jack 垂直支腿	Extension 伸	15s	
	Retraction 缩	15s	
Outrigger beam 水平支腿	Extension 伸	15s	
	Retraction 缩	15s	

Crane Introduction

整机介绍

Carrier 下车



Carrier frame 车架

- Double longitudinal beam construction welded by high strength steel plate, higher bearing capacity.
- 车架为高强度钢板焊接而成的双纵梁结构，承载能力强。



Chassis engine 底盘发动机

- Model: Cummins B6.7 inline six-cylinder diesel engine with watercooler and inter cooler.
- Rated power: 173kW/2000rpm.
- Emission standard: EU stage V.
- Fuel reservoir capacity: 330L.
- 型号：康明斯B6.7 173kw直列六缸、水冷却、增压中冷、柴油发动机。
- 额定功率：173kW/2000rpm。
- 排放标准：符合欧V排放。
- 油箱容积：330L。



Transmission 变速箱

- Auto-transmission, 6 forward gears and 3 reverse gears, large speed ratio range, adaptable to slope climbing and high-speed traveling.
- 自动变速箱，变速箱有6个前进档、3个后退档，速比范围大，即可满足低速场地爬坡行驶又可满足高速行驶。



Axle 车桥

- Two axle chassis of flexible maneuverability, four-wheel drive, excellent dynamic performance.
- 操控灵活，底盘两桥设计，前、后桥驱动，动力性能好。



Suspension system 悬挂系统

- The front is rigidly mounted, and the rear axle adopts pivot oscillation suspension with hydraulic lockout.
- 前桥刚性连接，后桥带油缸锁定枢轴摆动悬挂。



Electrical system 电气系统

- Two packs of 12V, 180Ah batteries.
- 2块12V、180Ah电池。



Tires 轮胎

- Large diameter off-road 16-25 tires deliver large ground clearance and strong off-road agility.
- 大直径越野轮胎，离地间距大，越野性能强，轮胎型号16-25。



Wheel formula 车轮模式

- 4×2/4×4.



Brake 制动系统

- Dual circuit braking system. When one circuit fails, the other can still work normally, improving the safety and reliability of the braking system.
- 双回路制动系统，当某一回路出现故障时，另一回路仍能正常工作，提高制动系统的安全性和可靠性。



Hydraulics 液压系统

- Adopt stable and high-quality main oil pump, enhancing system reliability. Precise parameter matching contributes to superior controllability of the vehicle.
- 采用稳定、高品质的主油泵，系统可靠性高；通过精确的参数匹配，操控性能优越。



Outrigger 支腿

- H-type telescoping outrigger, 4-point support, with span (longitudinal × transverse) 6.3m×6.2m.
- 采用H形伸缩支腿，4点支撑，纵、横跨距6.3m×6.2m。



Control system 控制系统

- CAN-BUS: The bus instrument of integrated intelligent control electrical system can display driving parameters at any time, making driving easier. At the same time, engine failure prompt makes the maintenance and troubleshooting more convenient and faster.
- All-round safety protection, the main and auxiliary hoists are equipped with three-circle indicators and A2B switches to prevent over-hoist-down and over winding of the wire ropes.
- Load moment indicator: It adopts highly intelligent moment indicator system to fully protect lifting operation and ensure accuracy, stability and comfort.
- 总线仪表：采用集成一体智能控制电气系统的总线仪表，可随时掌控行驾参数，驾乘轻松；同时拥有发动机故障提示功能，维修排故方便、快捷。
- 全方位的安全保护系统，主、副卷扬配置三圈保护器和高度限位器，防止钢丝绳过放和过卷，防倾翻保护，极限角度保护。
- 力 limiter：采用高度智能力矩限制器系统，全方位保护吊载作业，确保操作精准、平稳、舒适。

Crane Introduction

整机介绍



Operator's cab 操纵室

- New generation operator's cab, curved-rail sliding door, safety glass and corrosion resistant steel construction with softened interior trim. Equipped with panoramic skylight, adjustable seat and other user-friendly design incl. A/C, electric wiper, sunshade, making it more comfortable and easier to work. The LMI screen is equipped to realize the logic integration of the control console and the display, so that all working data can be seen at a glance.
- 全新一代操纵室，带变轨滑移门，配备安全玻璃，耐腐蚀钢板，配置软化内饰、可调式座椅等人性化设计，配有空调、电动雨刮器、遮阳帘，操作更舒适、轻松；配置力矩限制器显示屏，实现主控台与操作显示系统有机结合，使吊装作业的全部工况数据一目了然。



Boom system 臂架系统

- Boom: Five-section, basic boom 9.6m, full-extension 37.4m, made of high-strength welded structural steel with U-shape cross-section.
- Jib: 8m jib, offset at 0°, 20°, 40°.
- 主臂：五节臂，基本臂9.6m，全伸臂37.4m，由高强度焊接结构钢制成，U形截面。
- 副臂：一节8m副臂，安装角度为0°，20°，40°。



Slewing platform 转台结构

- SANY independently developed, made of fine grain high strength steel in optimized structure.
- 三一自主设计，结构更优化，由细晶粒高强度钢制成。



Hydraulics 液压系统

- Load sensing variable piston pump can adjust displacement in real time to achieve high precision flow control, greatly reducing energy loss.
- Winch adopts electronically controlled fixed displacement motor with high operation efficiency. Max. single rope speed of main and auxiliary winch is 130m/min.
- Slewing system integrating slewing buffer and free swing technology, start & brake process is smoother and the inching motion performance is ever better.
- 采用负载敏感变量柱塞泵，能实时调节油泵排量，实现高精度的流量控制，极大的降低能量损耗。
- 卷扬采用电控定量马达，作业效率高；主、副卷扬单绳速度最大达130m/min。
- 回转系统带集成回转缓冲阀，具有自由滑转功能，回转启动和控制平稳，微动性卓越。



Hoist 起升机构

- Pump and motor are applied, highly efficient and energy saving. Balance valve and unique anti-hook-slip technology are perfectly coupled to achieve smooth rise and fall of the load. Non-rotation high strength wire rope is used.
- 泵、马达高效节能。卷扬平衡阀与独特的防溜钩技术完美结合，重物起落平稳。配备防旋转高强度钢丝绳。



Luffing system 变幅系统

- Double acting single rod hydraulic cylinder with balance valve, luffing angle: -2°~80°. Passive luffing down, reducing energy consumption, improving luffing stability.
- 双作用单活塞杆液压缸，带安全平衡阀，变幅角度：-2°~80°，采用自重落幅系统，降低能耗，提高落幅操作的平稳性。



Slewing 回转系统

- 360° slewing in both directions, max. speed 2.6r/min. It adopts electro proportional speed control for stable movement and system reliability. The unique slewing balance design makes the braking smoother.
- 360°转动，最大回转速度2.6r/min。电控比例调速控制，动作稳定，系统可靠。独特的回转缓冲设计，制动更平稳。



Safety equipment 安全装置

- Load moment indicator: Analytical mechanics is applied and moment limiter calculation system based on the hoisting mechanics model is established. Through online empty-load calibration, the rated accuracy can reach 0~10% to fully protect the hoisting operation. In case of overload, the system will automatically give an alarm to guarantee safety operation.
- The hydraulic system includes balance valve, relief valve, two-way holding valve, etc. to realize system stability and reliability.
- The main and auxiliary winches are equipped with third-wrap indicators to prevent over-hoist-down of the wire rope.
- Boom head and jib head are equipped with A2B switches to prevent the wire rope from over winding.
- The length & angle sensor and pressure sensor are equipped to signify working status in real time, automatically stopping hazardous actions with buzzer alarm.
- 力矩限制器：采用分析力学方法，建立了基于吊重力学模型的力矩限制器计算系统，通过在线空载标定，额定吊重精度达到0~10%，全方位保护吊载作业；超载作业时，系统自动报警提示，为操纵作业提供安全保障。
- 液压系统配置平衡阀、溢流阀、双向液压锁等元件，实现液压系统稳定可靠。
- 主、副卷扬配置三圈保护器，防止钢丝绳过放。
- 主、副臂臂端配置高度限位器，防止钢丝绳过卷。
- 配置长度角度传感器、压力传感器，实时显示起重机作业状态，自动切断危险动作，蜂鸣报警。



Counterweight 配重

- Fixed block 5.5t.
- 固定配重5.5t。




Optional equipment at extra fees 选配

- Jib / Auxiliary winch / Auxiliary hook / Reversing camera / Winch camera / Boom tip camera / Spark arrester / Air intake shutoff valve / Outrigger load sensor / Wireless remote control / other equipment available upon request.
- 副臂/副卷扬/副钩/倒车影像/卷扬摄像头/臂尖摄像头/火星灭火器/发动机进气关断阀/支腿压力传感器/无线遥控/其它选配视需求而定。

Working Conditions

工况组合

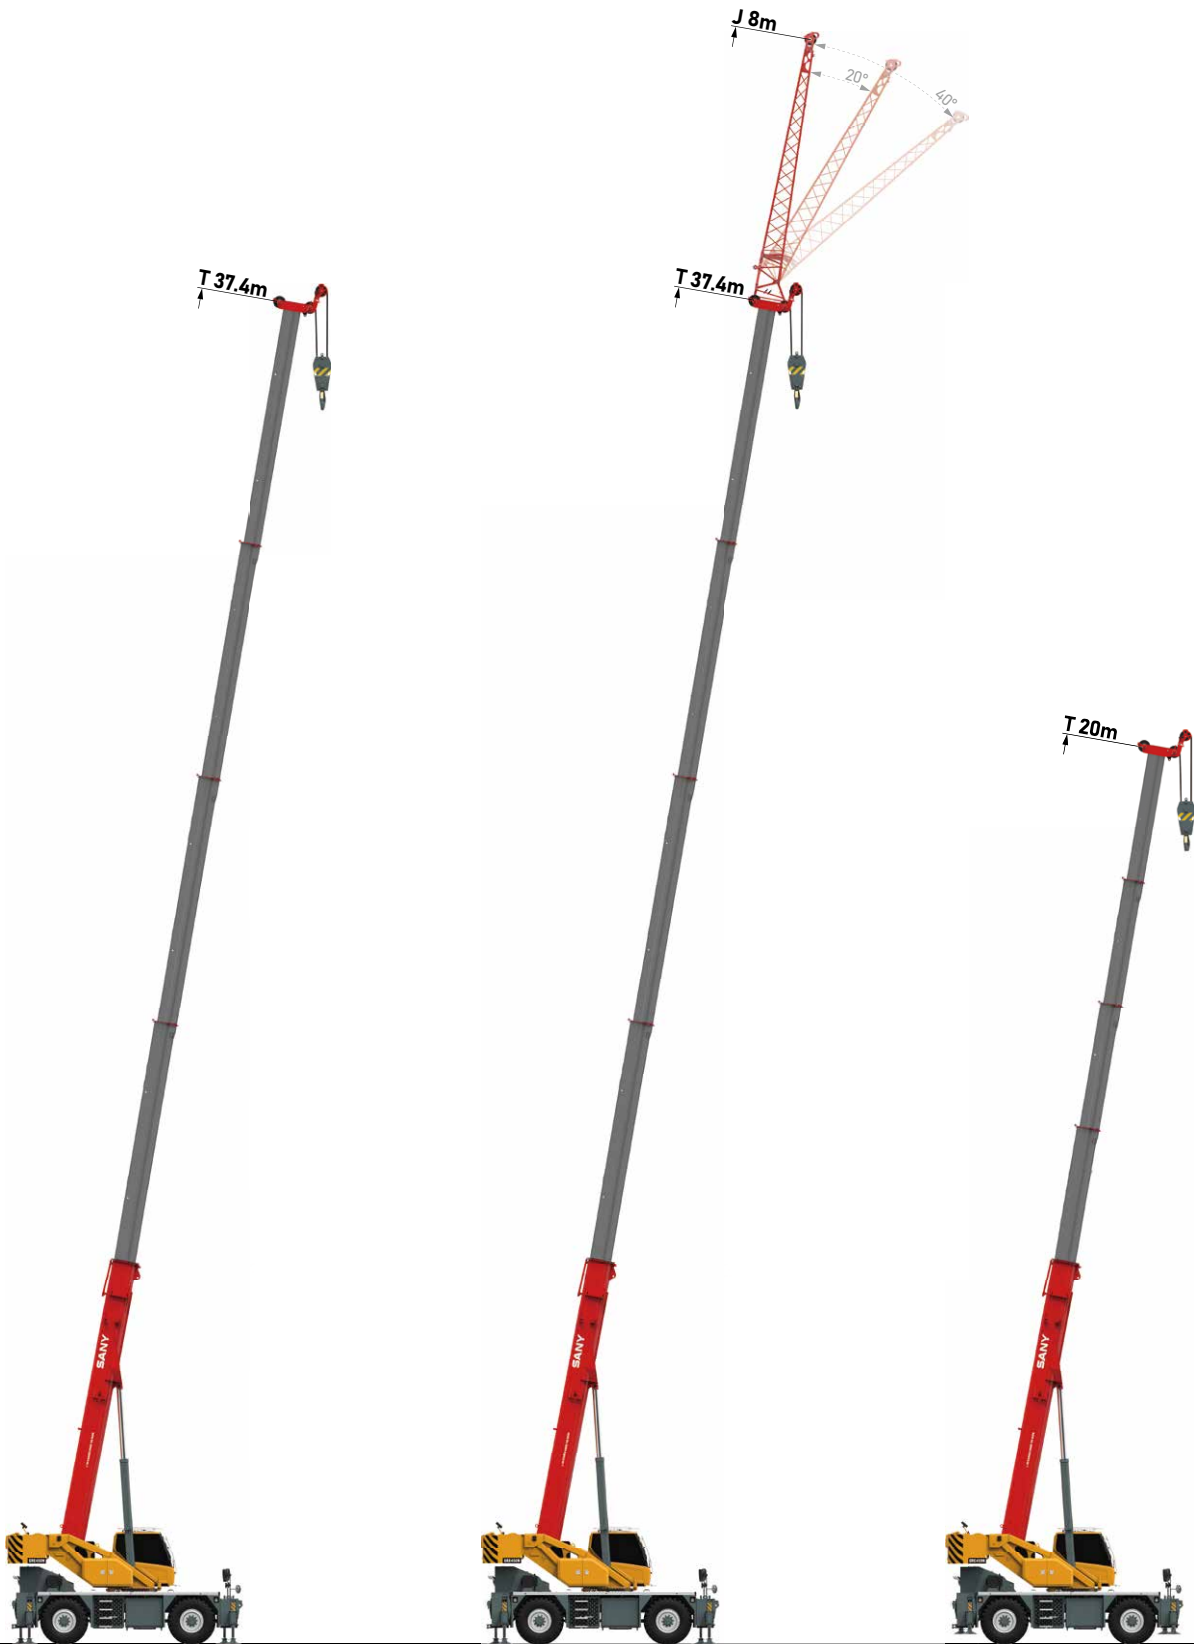


Telescopic boom on outriggers
主臂、支腿吊载

Fixed jib on outriggers
固定副臂、支腿吊载

Telescopic boom on tires
主臂、轮胎吊载


Operating Range - Telescopic Boom (T)

起升高度曲线 - 主臂

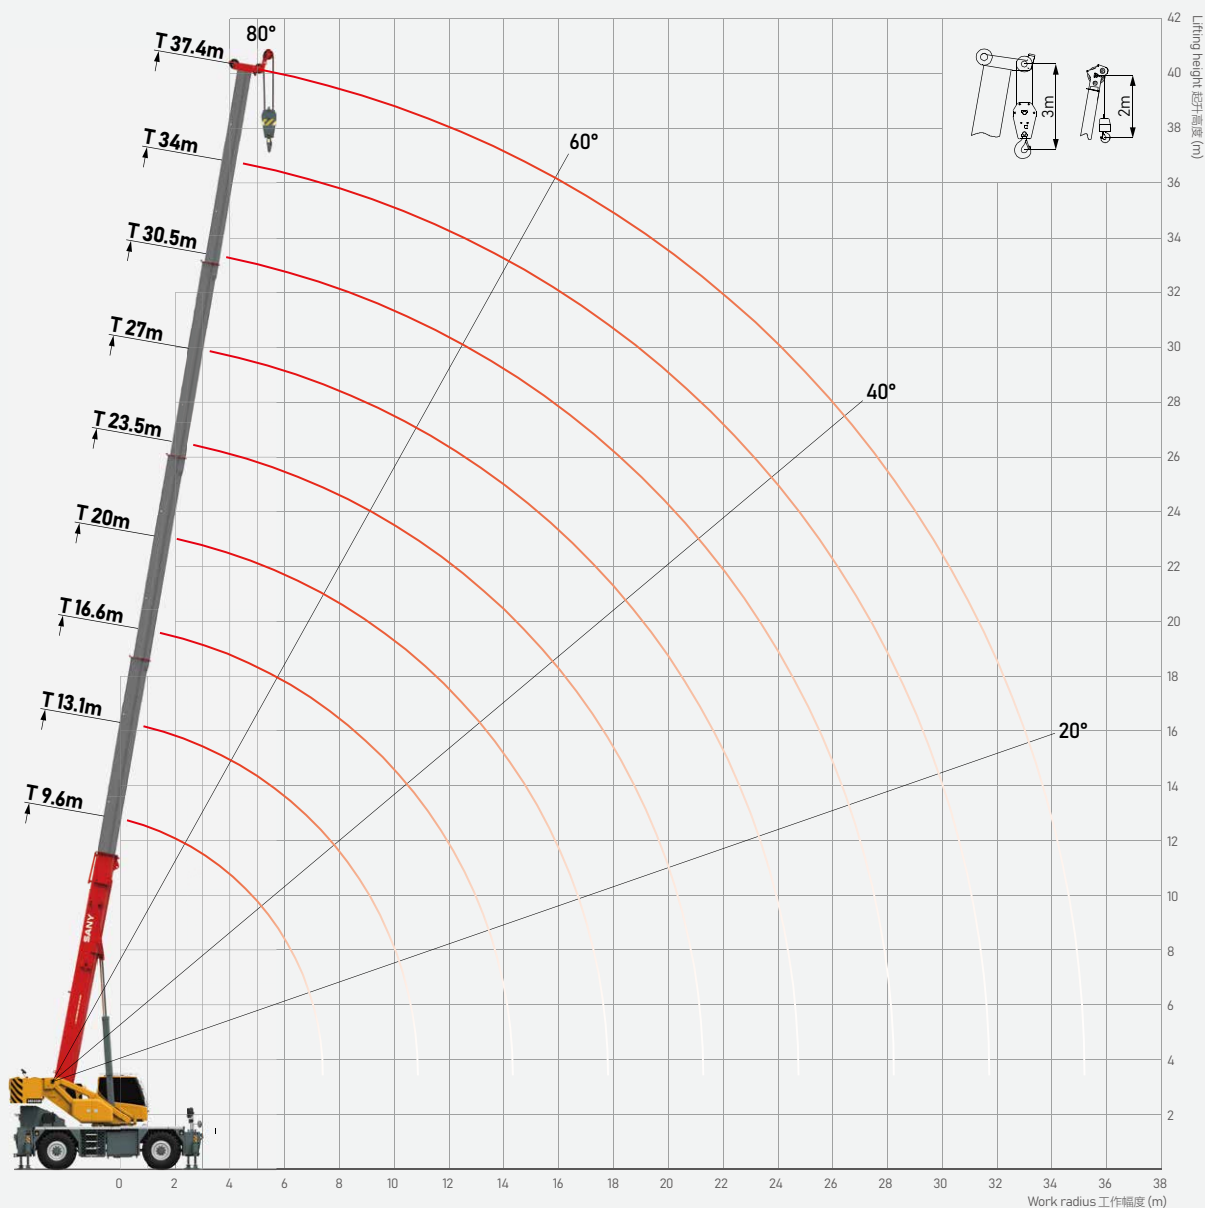

Load Chart - Telescopic Boom (T)

性能表 - 主臂




Unit: t

 m	Mode 1									Mode 2									 m
	9.6	13.1	16.6	20.0	23.5	27.0	30.5	34.0	37.4	9.6	13.1	16.6	20.0	23.5	27.0	30.5	34.0	37.4	
2.5	45									45									2.5
3	40	36.6	26							40	19	18	17.6						3
3.5	35.7	33.5	24	17.6						35.7	19.2	18	17.6						3.5
4	33	31	22	17.6	17					33	19.8	18.5	17.3	13					4
4.5	30.5	29	20.7	17.6	17	14.5				30.5	20.3	18.5	16.4	12.5	10.1				4.5
5	28.5	27	19.5	17	16	14				28.5	20.5	18.5	15.5	12	9.6				5
6	22.5	21.5	18	15	14	12.2	10			22.5	22	18	14	11.5	8.8	6.4			6
7	16.2	16.5	15	13.5	12.5	10.9	9.7	7.5		16.2	17	16.5	13	10	8.4	5.8	6		7
8		13	12.3	12	11	9.8	8.8	7.5	5.6		13.5	14	12	9.5	8.1	5.5	5.6	5.6	8
9		10.5	10	10.5	10	8.8	8	7.1	5.4		10.6	11	11	8.5	7.9	5.4	5.2	5.4	9
10		8.2	8	8.5	9	8	7.4	6.7	5		9	9.5	9.2	7.7	7.5	5.3	4.9	5	10
11			6.5	7	7.5	7.3	6.7	6.2	4.7			8	7.9	7.1	7	5.1	4.6	4.7	11
12			5.5	6	6.5	6.5	6.2	6	4.4			7	7	6.6	6.5	5	4.5	4.4	12
13			4.8	5.2	5.5	5.8	5.7	5.8	4.2			6	6	6.2	6	4.8	4.4	4.2	13
14			4	4.3	4.7	5	5	5.2	4			5.2	5.4	5.3	5.2	4.7	4.3	4	14
15				3.8	4.2	4.3	4.5	4.5	3.7				4.8	4.8	4.7	4.5	4.2	3.7	15
16				3.3	3.5	3.8	4	4.1	3.5				4.2	4.3	4.4	4.1	4	3.5	16
17				2.8	3.2	3.4	3.6	3.7	3.3				3.8	4	4.2	3.6	3.6	3.3	17
18					2.8	3	3.2	3.3	3.1					3.5	3.7	3.2	3.2	3.1	18
19					2.5	2.7	2.9	3	2.9					3.2	3.5	3.1	3	2.9	19
20					2.2	2.3	2.7	2.7	2.7					2.9	3.2	2.9	2.8	2.7	20
21					1.9	2	2.2	2.5	2.4					2.6	2.8	2.7	2.4	2.4	21
22						1.8	2	2.3	2.2						2.6	2.5	2.2	2.2	22
23						1.6	1.8	2	1.9						2.4	2.3	2	1.9	23
24						1.3	1.6	1.7	1.8						2.2	2.1	1.9	1.8	24
25							1.4	1.5	1.6							2	1.8	1.6	25
26							1.3	1.3	1.5							1.8	1.6	1.5	26
27							1.2	1.1	1.3							1.6	1.5	1.3	27
28							1	0.9	1.2							1.4	1.3	1.2	28
29								0.8	1.1								1.2	1.1	29
30								0.7	0.9								1.1	0.9	30
31								0.5	0.7								0.9	0.7	31
32									0.6									0.6	32
33									0.5									0.5	33
34									0.4									0.4	34
35									0.3									0.3	35
 1#	0%	50%	100%	100%	100%	100%	100%	100%	100%	0%	0%	0%	0%	0%	0%	0%	50%	100%	 1#
 2#	0%	0%	0%	17%	33%	50%	67%	83%	100%	0%	17%	33%	50%	67%	83%	100%	100%	100%	 2#
 C _n	10	8	6	6	5	4	4	3	3	10	8	6	6	4	4	4	3	3	 C _n

Load Chart - Telescopic Boom (T)

性能表 - 主臂




Unit: t

	Mode 1									Mode 2									
	9.6	13.1	16.6	20.0	23.5	27.0	30.5	34.0	37.4	9.6	13.1	16.6	20.0	23.5	27.0	30.5	34.0	37.4	
2.5	44									44									2.5
3	40	36.6	26							40	19	18							3
3.5	35.7	33.5	24	17.6						35.7	19	18	16						3.5
4	26.3	25	22	17.6	17					26.3	19	18.5	16	12.8					4
4.5	20.6	19.8	20.5	17.6	16.3	14				20.6	19	18.5	16	12.1	10.1				4.5
5	17	16.2	15.8	16.8	15.2	14				17	16.5	16.6	15	11.5	9.6				5
6	12.1	11.6	10.5	11.6	11.8	12.2	10			12.1	12	12.1	12.2	10.5	8.8	6.4			6
7	8.8	8.8	8	8.9	9.1	9.3	9.7	7.5		8.8	9.2	9.4	9.5	9.6	8.1	5.8	6		7
8		6.9	6	7	7.3	7.5	7.5	7.5	5.6		7.4	7.7	7.7	7.8	7.5	5.4	5.6	5.6	8
9		5.5	4.5	5.7	6	6	6.3	6.2	5.4		6.1	6.4	6.4	6.5	6.9	4.9	5.2	5.4	9
10		4	3.5	4.5	5	5	5.2	5.3	5		4.6	4.7	5.4	5.5	5.6	4.5	4.8	5	10
11			2.5	3	4.2	4	4.5	4.5	4.7			4	4.5	4.7	4.7	4.1	4.5	4.7	11
12			2	2.5	3.5	3.3	3.8	3.9	3.9			3.5	4	4.1	4.1	3.8	4.2	3.9	12
13			1.5	2	3	2.7	3.2	3.3	3.4			3	3.5	3.6	3.6	3.5	3.4	3.4	13
14			1	1.4	2.2	2.2	2.8	2.9	3			2.5	3	3.1	3.2	3.2	3	3	14
15				1	1.7	1.8	2.5	2.6	2.6				2.6	2.5	2.8	2.9	2.7	2.6	15
16				0.8	1.4	1.3	2.1	2.2	2.3				2.3	2.2	2.4	2.6	2.4	2.3	16
17				0.7	1.1	0.9	1.9	2	2				1.5	2	1.9	2.3	2.1	2	17
18					0.8	0.7	1.6	1.7	1.8					1.8	1.6	1.9	1.8	1.8	18
19					0.7	0.6	1.4	1.5	1.6					1.5	1.4	1.5	1.5	1.6	19
20					0.6	0.5	1.2	1.3	1.4					1.2	1	1.1	1.2	1.4	20
21					0.4	0.4	1.1	1.1	1.1					1	0.8	1.2	1	1.1	21
22							0.9	0.9	0.9						0.7	0.9	0.8	0.9	22
23							0.7	0.7	0.7						0.6	0.6	0.6	0.7	23
24							0.5	0.6	0.5						0.4	0.4	0.4	0.5	24
25							0.4	0.4	0.4							0.3		0.4	25
26									0.3									0.3	26
27																			27
28																			28
29																			29
30																			30
31																			31
32																			32
33																			33
34																			34
35																			35
1#	0%	50%	100%	100%	100%	100%	100%	100%	100%	0%	0%	0%	0%	0%	0%	0%	50%	100%	1#
2#	0%	0%	0%	17%	33%	50%	67%	83%	100%	0%	17%	33%	50%	67%	83%	100%	100%	100%	2#
3#	8	8	6	4	4	3	3	3	3	8	4	4	4	4	3	3	3	3	3#

Load Chart - Telescopic Boom (T)

性能表 - 主臂

Unit: t




 m	Mode 1									Mode 2									 m
	9.6	13.1	16.6	20.0	23.5	27.0	30.5	34.0	37.4	9.6	13.1	16.6	20.0	23.5	27.0	30.5	34.0	37.4	
2.5																			2.5
3	18	16	15.5							18	19	18							3
3.5	14.5	12.6	12	12.4						14.5	14.5	14.3	14						3.5
4	11.3	10.3	1	10	10					11.3	11.8	11.7	11.5	12.8					4
4.5	9	8.6	8.2	8.4	8.5	8.2				9	9.8	9.8	9.8	9.8	10				4.5
5	7.5	7.5	7	7.2	7	7				7.5	8.3	8.5	8.4	8.5	8.3				5
6	5.5	5.5	5.2	5.4	5.4	5.4	5.4			5.5	6.2	6.5	6.5	6.6	6.5	6.4			6
7	4	4.1	3.9	4.2	4.3	4.3	4.2	4.3		4	5	5.1	5.2	5.3	5.2	5	4.5		7
8		3.2	3	3.3	3.4	3.5	3.5	3.4	3.4		3.8	4.1	4.2	4.3	4.3	4.2	3.8	3.4	8
9		2.5	2.3	2.6	3	2.9	2.9	2.8	2.8		3	3.4	3.5	3.6	3.6	3.6	3.1	2.8	9
10		1.8	1.8	2.1	2.6	2.4	2.4	2.3	2.3		2.4	2.8	2.9	3	3	3	2.6	2.3	10
11			1.3	1.6	2	2	2	2	2			2.3	2.4	2.5	2.6	2.6	2.3	2	11
12			0.9	1.2	1.6	1.6	1.7	1.6	1.7			1.9	2.1	2.1	2.2	2.3	1.9	1.7	12
13			0.6	0.8	1.2	1.3	1.4	1.3	1.4			1.6	1.7	1.8	1.9	2	1.7	1.4	13
14			0.3	0.5	0.9	1.1	1.2	0.9	1.2			1.3	1.5	1.6	1.6	1.7	1.5	1.2	14
15				0.3	0.7	0.8	0.9	0.6	1				1.3	1.4	1.4	1.5	1.3	1	15
16					0.4	0.6	0.8	0.5	0.8				1.1	1.2	1.2	1.3	1.1	0.8	16
17						0.4	0.6	0.4	0.7				0.8	0.9	1	1.1	0.9	0.7	17
18							0.4	0.3	0.6					0.7	0.9	1	0.7	0.6	18
19									0.4					0.5	0.8	0.8	0.6	0.4	19
20														0.4	0.4	0.6	0.5		20
21															0.3	0.4	0.3		21
22																0.3			22
23																			23
24																			24
25																			25
26																			26
27																			27
28																			28
29																			29
30																			30
31																			31
32																			32
33																			33
34																			34
35																			35
1#	0%	50%	100%	100%	100%	100%	100%	100%	100%	0%	0%	0%	0%	0%	0%	0%	50%	100%	1#
2#	0%	0%	0%	17%	33%	50%	67%	83%	100%	0%	17%	33%	50%	67%	83%	100%	100%	100%	2#
Un	4	4	4	4	4	3	3	3	3	4	4	4	4	4	3	3	3	3	Un

Remark 备注:

- Load capacity in the chart is the maximum weight which this crane could hoist, including the weight of hook blocks and riggings. The main hook weighs 320kg, the aux. hook weighs 85kg.
- Radius shown in the chart is the actual radius when loading.
- The load capacity in the chart is the maximum weight when this crane is supported with the firm ground and stays in level.
- Choose rated load capacity of the longer boom and radius when the actual boom length and radius are between two values in the charts.
- The machine can be used only when the wind force is less than grade 6.
- 性能表中额定起重量包括起重钩(主钩重320kg, 副钩重85kg)和吊具的重量。
- 性能表中工作幅度是指吊载后的实际幅度。
- 性能表中给定数值是在平整坚固的地面上, 整机调平状态下起重机的最大起重量。
- 如实际臂长和幅度介于两个数值之间时, 取较长的臂长及较大的幅度所决定的额定起重量进行起重作业。
- 起重作业风力等级需低于6级。

Operating Range - Telescopic Boom + Fixed Jib (TJ)


起升高度曲线 - 主臂 + 副臂

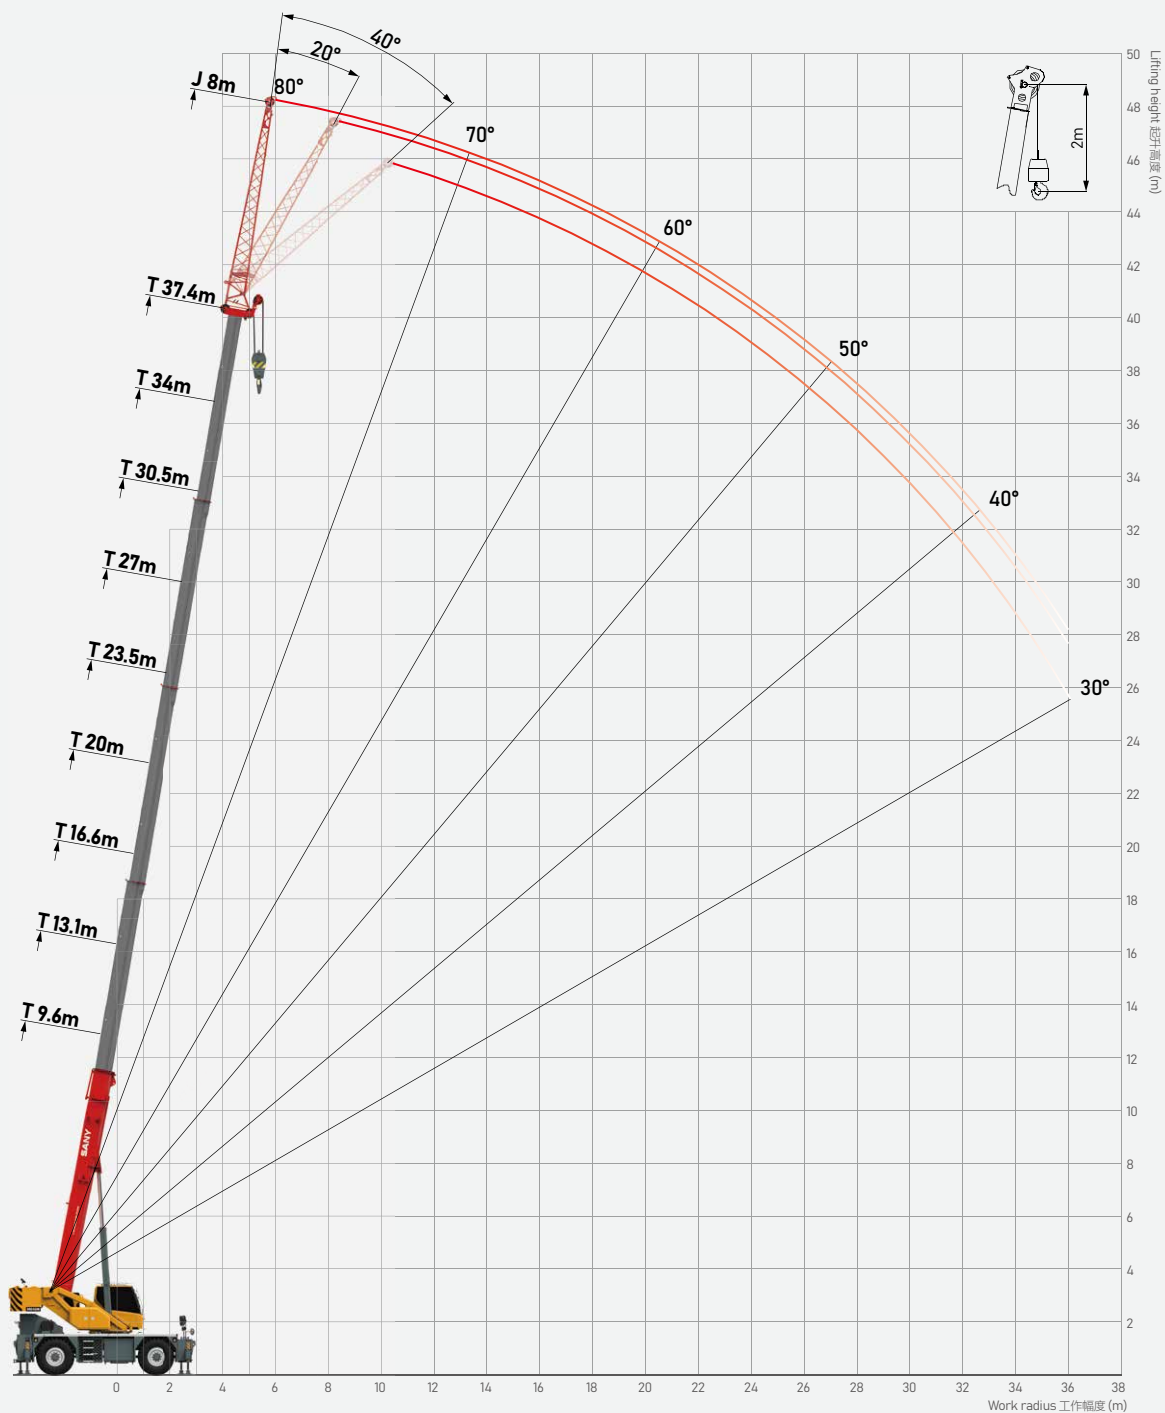

Load Chart - Telescopic Boom + Fixed Jib (TJ)

性能表 - 主臂 + 副臂


Unit: t



	33.93m+8m			37.4m+8m			
	0°	20°	40°	0°	20°	40°	
9	3.2						9
10	3			2.8			10
11	2.9	2.1		2.7			11
12	2.7	2		2.7	1.8		12
13	2.6	1.9	1.5	2.6	1.8		13
14	2.5	1.8	1.5	2.5	1.7	1.5	14
15	2.4	1.7	1.4	2.4	1.7	1.4	15
16	2.3	1.6	1.4	2.3	1.6	1.4	16
17	2.2	1.6	1.3	2.2	1.6	1.3	17
18	2.1	1.5	1.3	2.1	1.6	1.3	18
19	2	1.5	1.3	2	1.5	1.3	19
20	1.9	1.5	1.3	1.9	1.5	1.3	20
21	1.8	1.4	1.3	1.8	1.5	1.3	21
22	1.7	1.4	1.2	1.7	1.4	1.2	22
23	1.6	1.4	1.2	1.6	1.4	1.2	23
24	1.5	1.4	1.2	1.5	1.4	1.2	24
25	1.4	1.3	1.2	1.3	1.4	1.2	25
26	1.3	1.3	1.2	1.2	1.3	1.2	26
27	1.2	1.2	1.2	1.1	1.3	1.2	27
28	1.1	1.1	1.1	1	1.2	1.2	28
29	1	1	1	0.9	1.1	1.2	29
30	0.9	0.9	0.9	0.8	1	1.2	30
31	0.8	0.8	0.8	0.7	0.9	1	31
32	0.6	0.7	0.7	0.6	0.8	0.8	32
33	0.5	0.6	0.6	0.5	0.6	0.6	33
34	0.4	0.5	0.5	0.4	0.5	0.5	34
35	0.3	0.4	0.4	0.3	0.4	0.4	35
36					0.3	0.3	36
	100%	100%	100%	100%	100%	100%	
	83%	83%	83%	100%	100%	100%	

Load Chart - Telescopic Boom, On Tires Stationary, 360° Slewing

性能表 - 轮胎吊载 (360°)



Unit: t

	Mode 1				Mode 2				
	9.6m	13.1m	16.6m	19.8m	9.6m	13.1m	16.6m	20m	
3	12				12				3
3.5	9				9				3.5
4	8	7			8	8			4
4.5	6.5	6	5		6.5	7	6		4.5
5	5.5	4	4	4	5.5	6	5	5	5
6	3.5	3	3	3	3.5	4.5	4	4	6
7	2	2.3	2.2	2.2	2	3.3	3	3	7
8		1.5	1.3	1.5		2.5	2.5	2.5	8
9		0.8	0.7	1.1		1.8	2	2	9
10		0.3	0.3	0.6		1.3	1.7	1.5	10
11				0.3			1.2	1	11
12							0.8	0.8	12
13							0.5	0.6	13
14							0.3	0.4	14
15									15
16									16
17									17
1#	0%	50%	100%	100%	0%	0%	0%	0%	1#
2#	0%	0%	0%	17%	0%	17%	33%	50%	2#
3#	3	3	3	3	3	3	3	3	3#

Load Chart - Telescopic Boom, Pick & Carry, Load Over Front

性能表 - 主臂带载行驶(正前方)



Unit: t

	Mode 1				Mode 2				
	9.6m	13.1m	16.6m	20m	9.6m	13.1m	16.6m	20m	
3	10	9	8.8	9	10	9.5	9	9	3
3.5	8	8	7.5	8	8	8.5	8.5	8.5	3.5
4	7	7	7	7.2	7	7.5	8	7.8	4
4.5	6.5	6.2	6.2	6.5	6.5	6.8	7.2	7.2	4.5
5	5.5	5.8	5.5	5.8	5.5	6.2	6.5	6.5	5
6	4.5	4.5	4.5	4.8	4.5	5.2	5.5	5.6	6
7	3.5	3.8	3.6	4	3.5	4.5	4.6	4.8	7
8		3	3	3.3		3.8	4	4.2	8
9		2.5	2.4	2.8		3.2	3.5	3.5	9
10		2	1.8	2.3		2.6	3	3	10
11			1.4	1.8			2.5	2.6	11
12			1	1.5			2	2.2	12
13			0.7	1			1.7	1.9	13
14			0.4	0.7			1.4	1.6	14
15				0.4				1.4	15
16									16
17									17
1#	0%	50%	100%	100%	0%	0%	0%	0%	1#
2#	0%	0%	0%	17%	0%	17%	33%	50%	2#
3#	3	3	3	3	3	3	3	3	3#

Load Chart - Telescopic Boom, On Tires Stationary, Load Over Front

性能表 - 轮胎静止吊载(正前方)



Unit: t

 m	Mode 1				Mode 2				 m
	9.6m	13.1m	16.6m	20.0m	9.6m	13.1m	16.6m	20.0m	
3	16	15	14.5	14	16	16	16	16	3
3.5	15	14	13.5	13	15	15.5	16	16	3.5
4	13	12.5	12	11.5	13	13.5	14	13.5	4
4.5	11	10.5	10	9.5	11	11.5	12	11.5	4.5
5	8	7.8	7.6	7.8	8	8.5	8.8	8.5	5
6	7.2	7.3	7	7.3	7.2	7.5	7.8	7.5	6
7	6.5	6.2	6	6.5	6.5	6.5	6.8	6.5	7
8		5.5	5.3	5.2		5.5	6	5.3	8
9		3.5	4	4		4.5	5	4.5	9
10		2.5	3	3.3		3.8	4	3.7	10
11			2.5	2.6			3.5	3	11
12			2	2			3	2.7	12
13			1.5	1.5			2.5	2.2	13
14			1	1.2			2	1.8	14
15				0.8				1.5	15
16				0.5				1.2	16
17				0.4				1	17
	0%	50%	100%	100%	0%	0%	0%	0%	
	0%	0%	0%	17%	0%	17%	33%	50%	
	4	4	4	4	4	4	4	4	

Remark 备注:

- Capacities are applicable at 975kPa cold tire inflation pressure.
- Capacities are applicable only with machine on firm level surface.
- On tire lifting with the jib mounted is not permitted.
- Axle lockouts must be applied when lifting on tires.
- Parking brake must be applied when lifting on tires stationary.
- Driving speed shall be $\leq 4\text{km/h}$ at pick & carry mode.
- 冷态轮胎气压需保持975kPa。
- 起重机需在平整坚固的地面上作业。
- 轮胎吊载工况不允许使用副臂吊载。
- 轮胎吊载工况中，车桥悬挂需锁定。
- 轮胎静止吊载工况中，需使用驻车制动。
- 带载行驶工况中，直线行驶速度需小于等于4km/h。



SANY GROUP CRANE BU

SANY Mobile Crane and Tower Crane Industrial Park

No.168 Jinzhou Avenue, Jinzhou Development Zone, Changsha City, Hunan Province, P.R. China Zip 410600

SANY Crawler Crane Industrial Park

No. 2188 Daishan Road, Wuxing District, Huzhou City, Zhejiang Province, P. R. China Zip 313028

Consulting sanycrane@sanygroup.com (Crane BU) / crd@sany.com.cn (IHQ)

After-sales Service 0086-400 609 8318 (Overseas)

Reminder:

Any change in the technical parameters and configuration due to product modification or upgrade may occur without prior notice.

The machine in the picture may include additional equipment. This brochure is for reference only, and goods in kind shall prevail.

Copyright at SANY. No part of this brochure may be copied or used for any purpose without written approval from SANY.

© Edited in May 2025

三一集团起重事业部

三一轮式、塔式起重机产业园：中国湖南长沙金洲开发区金洲大道168号 邮编：410600

三一履带起重机产业园：中国浙江湖州市吴兴区黛山路2188号 邮编：313028

咨询：sanycrane@sanygroup.com(起重事业部) / crd@sany.com.cn(国际总部)

售后服务：0086-400 609 8318(海外)

温馨提示：

由于技术不断更新，技术参数及配置如有更改，恕不另行通知。图中机器可能包括附加设备，本画册仅供参考，以实物为准。

版权为三一所有，未经三一书面许可，本画册任何内容不得被复制用于任何目的。

© 2025年5月版

🌐 SANY GROUP: www.sanygroup.com | SANY USED CRANE: sanyusedcranes.en.alibaba.com

SANY CRANE |  |  YouTube @[sanycrane4878](https://www.youtube.com/sanycrane4878) |  Sany-crane |  SANYCraneGlobal

